

12/23/97  
1525 U.S. PTO

A

LAW OFFICES  
**SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC**

2100 PENNSYLVANIA AVENUE, N.W.  
WASHINGTON, D.C. 20037-3202  
TELEPHONE (202) 293-7060  
FACSIMILE (202) 293-7860

**CALIFORNIA OFFICE**  
1010 EL CAMINO REAL  
MENLO PARK, CA 94025  
TELEPHONE (650) 325-5800  
FACSIMILE (650) 325-6606

**JAPAN OFFICE**  
TOEI NISHI SHIMBASHI BLDG. 4F  
13-5 NISHI SHIMBASHI 1-CHOME  
MINATO-KU, TOKYO 105, JAPAN  
TELEPHONE (03) 3503-3760  
FACSIMILE (03) 3503-3756

December 23, 1997

**BOX PATENT APPLICATION**  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Re: Application of Yasuo HIMURO  
**PNEUMATIC RADIAL TIRE FOR ALL-SEASON PASSENGER CAR**  
Our Ref: Q48849

Dear Sir:

Attached hereto is the application identified above including the specification, claims, three (3) sheets of formal drawings, **executed Assignment and PTO 1595 form, and executed Declaration and Power of Attorney.**

The Government filing fee is calculated as follows:

Total claims	$\frac{10}{- 20} = \frac{0}{0} \times \$22 =$	\$ 0.00
Independent claims	$\frac{1}{- 3} = \frac{0}{0} \times \$82 =$	\$ 0.00
Base Fee		\$ 790.00
<b>TOTAL FILING FEE</b>		<b>\$ 790.00</b>
Recordation of Assignment		\$ 40.00
<b>TOTAL FEE</b>		<b>\$ 830.00</b>

Checks for the statutory filing fee of \$790.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from Japanese Patent Application No. 9-38137 filed February 21, 1997.

Respectfully submitted,

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
Attorneys for Applicant

By: Neil B. Siegel #21,092  
for Neil B. Siegel  
Registration No. 25,200

97108 (9-38,137)

PNEUMATIC RADIAL TIRE FOR ALL-SEASON PASSENGER CAR

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to a pneumatic tire and more particularly to a pneumatic radial tire for all-season  
5 passenger car.

Description of Related Art

As shown in Fig. 3, the conventionally typical pneumatic radial tire for all-season passenger car had a tread pattern in which many blocks were formed at given  
10 intervals in an axial direction and a circumferential direction of the tire by a plurality of circumferential grooves straightforward extending in the circumferential direction and a plurality of slant grooves each extending at an inclination angle of about 45° with respect to the  
15 circumferential direction.

In this type of the pneumatic radial tire for all-season passenger car, it is required to have various performances such as drainage property in the running on wet road surface, steering stability in the running on dry road  
20 surface, snow performances in the running on snow, e.g. braking performance, traction performance, straight running performance, cornering performance and the like, resistance to uneven wear and so on.

Recently, it is demanded to develop pneumatic radial  
25 tires for all-season passenger car developing an excellent drainage property in the running on wet road surface without

substantially sacrificing the steering stability in the running on dry road surface, the snow performances and the resistance to uneven wear.

SUMMARY OF THE INVENTION

5           It is, therefore, an object of the invention to provide a pneumatic radial tire for all-season passenger car having an excellent drainage property in the running on wet road surface without degrading various performances of the conventional pneumatic radial tire for all-season passenger  
10 car, particularly the steering stability in the running on dry road surface, the snow performances and the resistance to uneven wear.

          According to the invention, there is the provision of in a pneumatic radial tire for all-season passenger car  
15 comprising a tread with a tread pattern defined by dividing the tread into many blocks through a plurality of slant grooves arranged at given intervals in a circumferential direction of the tire and at least one circumferential center groove extending in the circumferential direction of  
20 the tire at a center of the pattern, and consisting of a central zone having a width corresponding to 30-60% of a tread width and a pair of side zones located on both sides of the central zone, the improvement wherein

(1) the slant grooves comprise steeply slant grooves  
25 extending at a relatively small inclination angle with respect to the circumferential direction and gently slant grooves extending at a relatively large inclination angle with respect to the circumferential direction;

(2) the steeply slant groove is opened to the circumferential center groove in the central zone of the tread, while the gently slant groove is opened to a tread end in each of both side zones of the tread;

5 (3) the number of the gently slant grooves is made two times or more than the number of the steeply slant grooves so that an interval between the gently slant grooves in the circumferential direction is made  $1/2$  or less than an interval between the steeply slant grooves in the  
10 circumferential direction;

(4) each of the blocks is provided with at least one sipe; and

(5) each of the blocks defined by the circumferential center groove and the steeply slant grooves is chamfered  
15 from a tapered top end over a range of 10-30 mm toward a longitudinal direction of the block so as to gradually shallow a depth of a surface of the block from the tapered top end toward the longitudinal direction.

In preferable embodiments of the invention, the  
20 steeply slant groove extends at an inclination angle of  $10^{\circ}$ - $50^{\circ}$  with respect to the circumferential direction, and the gently slant groove extends at an inclination angle of  $60^{\circ}$ - $90^{\circ}$  with respect to the circumferential direction, and the chamfered surface of the block is a curved surface  
25 having a radius of curvature of 10-100 mm, and the steeply slant groove is communicated with the gently slant groove.

In another preferable embodiments of the invention, a circumferential side groove extending in the circumferential

direction of the tire is arranged in a position separated inward from the tread end at about 1/4 of the tread width in an axial direction of the tire, and the gently slant groove is opened to the circumferential side groove.

5           In the other preferable embodiments of the invention, the extending direction of the side formed in the block differs between the central zone and the side zone of the tread, and the sipe formed in the blocks at both side zones of the tread extends in parallel to or substantially in  
10 parallel to the gently slant groove to be opened to the circumferential side groove, and the sipe formed in the block at the central zone of the tread is opened to the steeply slant groove at a cross angle of not less than 45°.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15           The invention will be described with reference to the accompanying drawings, wherein:

Fig. 1 is a partly enlarged plan view of a first embodiment of the tread pattern in the pneumatic radial tire according to the invention;

20           Fig. 2 is a partly enlarged plan view of a second embodiment of the tread pattern in the pneumatic radial tire according to the invention; and

Fig. 3 is a partly enlarged plan view of a tread pattern in the conventional pneumatic radial tire.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

25           In the pneumatic radial tire according to the invention having the above structure, at least one circumferential center groove extending in the circumferential

direction of the tire is particularly arranged in the center of the pattern, and the steeply slant groove arranged in the central zone of the tread and opening to the circumferential center groove is communicated with the gently slant groove arranged in each side zone of the tread and opening to the tread end, so that the draining action is smoothly carried out from the pattern center toward the tread end and hence there is obtained a pneumatic radial tire having an excellent drainage property in the running on wet road surface. However, a tapered top end portion is formed in each of the blocks defined by the circumferential center groove and the steeply slant grooves, so that there may be caused a tendency of extremely degrading the steering stability in the running on dry road surface and the resistance to uneven wear due to the lacking of block rigidity.

Furthermore, each of the blocks defined by the circumferential center groove and the steeply slant grooves is chamfered from the tapered top end over a range of 10-30 mm toward the longitudinal direction of the block so as to gradually shallow the depth of the block surface from the tapered top end toward the longitudinal direction as mentioned above, so that the branching of water flow is smoothly carried out to control or prevent the occurrence of air bubbles due to turbulence and to improve the drainage property of the tire. In this case, the block rigidity is ensured, so that there is not caused the extreme degradation of the steering stability in the running on dry road surface

and the resistance to uneven wear. Preferably, the chamfered surface of the block is a curved surface having a radius of curvature of 10-100 mm, so that the resistance of water can efficiently be decreased and also the crushing can be  
5 suppressed to obtain a high ground contact pressure and hence ensure the steering stability.

And also, the number of the gently slant grooves is made two times or more than the number of the steeply slant grooves so that an interval between the gently slant grooves  
10 in the circumferential direction is made  $1/2$  or less than an interval between the steeply slant grooves in the circumferential direction as mentioned above, so that the interval between the gently slant grooves in the circumferential  
15 tread including the steeply slant grooves and hence the block rigidity is ensured, while the interval between the gently slant grooves in the circumferential direction is relatively small in each of both side zones of the tread including the gently slant grooves and hence the drainage  
20 property in the running on wet road surface, pitch variation effect for controlling the pattern noise and the resistance to uneven wear (heel and toe wear) are improved.

Moreover, at least one sipe is formed in each of the blocks, so that the snow performances as an all-season tire  
25 and the gripping performance in the running on wet road surface are ensured. When the extending direction of the side formed in the block differs between the central zone and the side zone of the tread, the directionality of block

rigidity in the tread pattern can be denied to suppress the occurrence of bad steering control and uneven wear (diagonal wear). And also, the sipe formed in the block at the central zone of the tread is opened to the steeply slant groove at a cross angle of not less than  $45^\circ$ , so that the resistance to uneven wear is improved.

The following examples are given in illustration of the invention and are not intended as limitations thereof.

In Fig. 1 is shown a tread pattern of the pneumatic radial tire according to the invention having a tire size of 205/60R15 and a tread width TW of 160 mm as Example 1.

As shown in Fig. 1, the tread of this tire comprises a central zone TC having a width corresponding to 45% of the tread width TW and a pair of side zones TS located on both sides of the central zone TC and has a tread pattern defined by dividing the tread into many blocks 3 through a plurality of slant grooves 1, 2 arranged at given intervals in a circumferential direction of the tire and two circumferential center grooves 4 extending in the circumferential direction of the tire at a center of the pattern.

The slant grooves 1, 2 comprise steeply slant grooves 1 extending at a relatively small inclination angle of  $20^\circ$ - $40^\circ$  with respect to the circumferential direction and gently slant grooves 2 extending at a relatively large inclination angle of  $70^\circ$ - $80^\circ$  with respect to the circumferential direction. The steeply slant grooves 1 are arranged in the central zone TC of the tread and opened to the circumferential center groove 4, while the gently slant



grooves 2 are arranged in each of the side zones TS in the tread and opened to an end TE of the tread.

The gently slant grooves 2 are arranged in the number larger by two times than that of the steeply slant grooves 1 in such a manner that the interval between the gently slant grooves 2 in the circumferential direction is 1/2 of the interval between the steeply slant grooves in the circumferential direction. Further, the steeply slant groove 1 is communicated with the gently slant groove 2.

10 In this case, since the number of the gently slant grooves 2 is larger by two times than the number of the steeply slant grooves 1, all of the steeply slant grooves 1 are communicated with only half of the total gently slant grooves 2.

A circumferential side groove 5 extending in the circumferential direction is arranged in a position separated inward from the tread end TE by about 1/4 of the tread width TW in an axial direction of the tire. The gently slant groove 2 is opened to the circumferential side groove 5.

At least one sipe 6 is formed in each of the blocks 3, in which the extending direction of the sipe 6 in the block 3 is upward to the right in the central zone TC of the tread and upward to the left in both side zones TS of the tread as shown in Fig. 1. Further, the sipe 6 formed in the block 3 at each of the side zones TS extends in parallel to or substantially in parallel to the gently slant groove 2 and is opened to the circumferential side groove 5, while the sipe 6 formed in the block 3 at the central zone TC is

opened to the steeply slant groove 1 at a cross angle of not less than  $45^\circ$ .

Each of the blocks 3 defined by the circumferential center groove 4 and the steeply slant grooves 1 is chamfered from the tapered top end over 25 mm toward the longitudinal direction of the block so as to gradually shallow the depth of the block surface from the tapered top end toward the longitudinal direction as mentioned above, and the chamfered surface of the block is a curved surface having a radius of curvature of about 30 mm.

In Fig. 2 is shown a tread pattern of the pneumatic radial tire according to the invention having a tire size of 205/60R15 and a tread width TW of 160 mm as Example 2.

As shown in Fig. 2, the tread of this tire comprises a central zone TC having a width corresponding to 45% of the tread width TW and a pair of side zones TS located on both sides of the central zone TC and has a tread pattern defined by dividing the tread into many blocks 3 through a plurality of slant grooves 1, 2 arranged at given intervals in a circumferential direction of the tire and two circumferential center grooves 4 extending in the circumferential direction of the tire at a center of the pattern.

The slant grooves 1, 2 comprise steeply slant grooves 1 extending at a relatively small inclination angle of  $20^\circ$ - $40^\circ$  with respect to the circumferential direction and gently slant grooves 2 extending at a relatively large inclination angle of  $70^\circ$ - $80^\circ$  with respect to the circumferential direction. The steeply slant grooves 1 are arranged

in the central zone TC of the tread and opened to the circumferential center groove 4, while the gently slant grooves 2 are arranged in each of the side zones TS in the tread and opened to an end TE of the tread.

5           The gently slant grooves 2 are arranged in the number larger by two times than that of the steeply slant grooves 1 in such a manner that the interval between the gently slant grooves 2 in the circumferential direction is 1/2 of the interval between the steeply slant grooves in the  
10 circumferential direction. Further, the steeply slant groove 1 is communicated with the gently slant groove 2. In this case, since the number of the gently slant grooves 2 is larger by two times than the number of the steeply slant grooves 1, all of the steeply slant grooves 1 are communicated  
15 with only half of the total gently slant grooves 2.

A circumferential side groove 5 extending in the circumferential direction is arranged in a position separated inward from the tread end TE by about 1/4 of the tread width TW in an axial direction of the tire. The gently  
20 slant groove 2 is opened to the circumferential side groove 5.

At least one sipe 6 is formed in each of the blocks 3, in which the sipe 6 is arranged in only the block 3 located in both side zones TS and is not arranged in the block 3 located in the central zone TC as shown in Fig. 2.  
25 Each of the blocks 3 defined by the circumferential center groove 4 and the steeply slant grooves 1 is chamfered from the tapered top end over 25 mm toward the longitudinal direction of the block so as to gradually shallow the depth

of the block surface from the tapered top end toward the longitudinal direction as mentioned above, and the chamfered surface of the block is a curved surface having a radius of curvature of about 30 mm.

5           In Fig. 3 is shown a tread pattern of a pneumatic radial tire as a conventional example.

          The tread of such a conventional tire has a tread pattern defined by dividing the tread into many blocks through five circumferential grooves extending straightforward  
10 in the circumferential direction and a plurality of slant grooves extending at an inclination angle of about 45° with respect to the circumferential direction.

          Test for evaluating the drainage property in the running on wet road surface, the steering stability on dry  
15 road surface, the snow performances and the resistance to uneven wear are carried out with respect to the tires of Examples 1 and 2 and conventional example.

          The drainage property in the running on wet road surface is evaluated by a driver's feeling on a hydroplaning  
20 limit speed when the tire is run on wet road surface having a water depth of 5 mm, and the steering stability on dry road surface is evaluated by a driver's feeling when the tire is run on a circuit course at various sport running modes, and the snow performances are total feeling  
25 evaluation of braking performance, traction performance, straight running performance and cornering performance on a pressed snow road surface of a test course, and the resistance to uneven wear is totally evaluated by visual

evaluation of worn shape when the tire is run on roads including an expressway, a mountain slope and streets over a distance of 10,000 km and measurement of step difference between adjoining blocks.

- 5 The test results are shown in Table 1, in which each of the properties is represented by an index on the basis that the conventional tire is 100. The larger the index value, the better the property.

Table 1

Tire	Example 1	Example 2	Conventional Example
Drainage property	120	140	100
Steering stability	100	105	100
Snow performances	105	90	100
Resistance to uneven wear	100	100	100

As mentioned above, according to the invention, there are provided pneumatic radial tires developing an excellent drainage property in the running on wet road surface without degrading the steering stability in the running on dry road surface, the snow performances and the resistance to uneven wear.

What is claimed is:

1. In a pneumatic radial tire for all-season passenger car comprising a tread with a tread pattern defined by dividing the tread into many blocks through a plurality of slant grooves arranged at given intervals in a circumferential direction of the tire and at least one circumferential center groove extending in the circumferential direction of the tire at a center of the pattern, and consisting of a central zone having a width corresponding to 30-60% of a tread width and a pair of side zones located on both sides of the central zone, the improvement wherein

- (1) the slant grooves comprise steeply slant grooves extending at a relatively small inclination angle with respect to the circumferential direction and gently slant grooves extending at a relatively large inclination angle with respect to the circumferential direction;
- (2) the steeply slant groove is opened to the circumferential center groove in the central zone of the tread, while the gently slant groove is opened to a tread end in each of both side zones of the tread;
- (3) the number of the gently slant grooves is made two times or more than the number of the steeply slant grooves so that an interval between the gently slant grooves in the circumferential direction is made  $1/2$  or less than an interval between the steeply slant grooves in the circumferential direction;

(4) each of the blocks is provided with at least one sipe;  
and

(5) each of the blocks defined by the circumferential center groove and the steeply slant grooves is chamfered from a tapered top end over a range of 10-30 mm toward a longitudinal direction of the block so as to gradually shallow a depth of a surface of the block from the tapered top end toward the longitudinal direction.

2. A pneumatic radial tire according to claim 1, wherein the steeply slant groove extends at an inclination angle of  $10^{\circ}$ - $50^{\circ}$  with respect to the circumferential direction.

3. A pneumatic radial tire according to claim 1, wherein the gently slant groove extends at an inclination angle of  $60^{\circ}$ - $90^{\circ}$  with respect to the circumferential direction.

4. A pneumatic radial tire according to claim 1, wherein the chamfered surface of the block is a curved surface having a radius of curvature of 10-100 mm.

5. A pneumatic radial tire according to claim 1, wherein the steeply slant groove is communicated with the gently slant groove.

6. A pneumatic radial tire according to claim 1, wherein a circumferential side groove extending in the circumferential direction of the tire is arranged in a position separated inward from the tread end at about  $1/4$  of the tread width in an axial direction of the tire.

7. A pneumatic radial tire according to claim 6, wherein the gently slant groove is opened to the circumferential side groove.

8. A pneumatic radial tire according to claim 1, wherein an extending direction of the side formed in the block differs between the central zone and the side zone of the tread.

9. A pneumatic radial tire according to claim 1, wherein the sipe formed in the blocks at both side zones of the tread extends in parallel to or substantially in parallel to the gently slant groove to be opened to the circumferential side groove.

10. A pneumatic radial tire according to claim 1, wherein the sipe formed in the block at the central zone of the tread is opened to the steeply slant groove at a cross angle of not less than 45°.



A pneumatic radial tire for all-season passenger car comprises a tread with a tread block pattern defined by plural slant grooves and at least one circumferential center groove and consisting of a central zone having a width corresponding to 30-60% of a tread width and a pair of side zones located on both sides of the central zone, wherein the slant grooves comprise steeply slant grooves and gently slant grooves each having a given shape, and the number of the gently slant grooves is made two times or more than the number of the steeply slant grooves, and the block is provided with at least one sipe, and each of the blocks defined by the circumferential center groove and the steeply slant grooves is chamfered from a tapered top end over a given range toward a longitudinal direction of the block.

A pneumatic radial tire for all-season passenger car comprises a tread with a tread block pattern defined by plural slant grooves and at least one circumferential center groove and consisting of a central zone having a width corresponding to 30-60% of a tread width and a pair of side zones located on both sides of the central zone, wherein the slant grooves comprise steeply slant grooves and gently slant grooves each having a given shape, and the number of the gently slant grooves is made two times or more than the number of the steeply slant grooves, and the block is provided with at least one sipe, and each of the blocks defined by the circumferential center groove and the steeply slant grooves is chamfered from a tapered top end over a given range toward a longitudinal direction of the block.

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

PNEUMATIC RADIAL TIRE FOR ALL-SEASON PASSENGER CAR

which application is:

X the attached application  
(for original application)

\_\_\_\_\_ application Serial No. \_\_\_\_\_  
filed \_\_\_\_\_, and amended on \_\_\_\_\_

(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above; that I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 C.F.R. 1.56, that I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

Application Number	Country	Filing Date	Priority Claimed (yes or no)
9-38,137	Japan	February 21, 1997	yes

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application under 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
------------------------	-------------	------------------------------------------

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorrow, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778 and Abraham J. Rosner, Reg. No. 33,276, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to **SUGHRUE, MION, ZINN, MACPEAK & SEAS**, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date December 1, 1997

First Inventor Yasuo HIMURO

First Name Middle Initial Last Name

Residence Tachikawa City, Tokyo,

Signature *Yasuo Himuro*


Japan

Post Office Address 71-7-407, Sunagawa-Cho 8-Chome,


Citizenship Japanese

Tachikawa City, Tokyo, Japan

**FIG. 1**

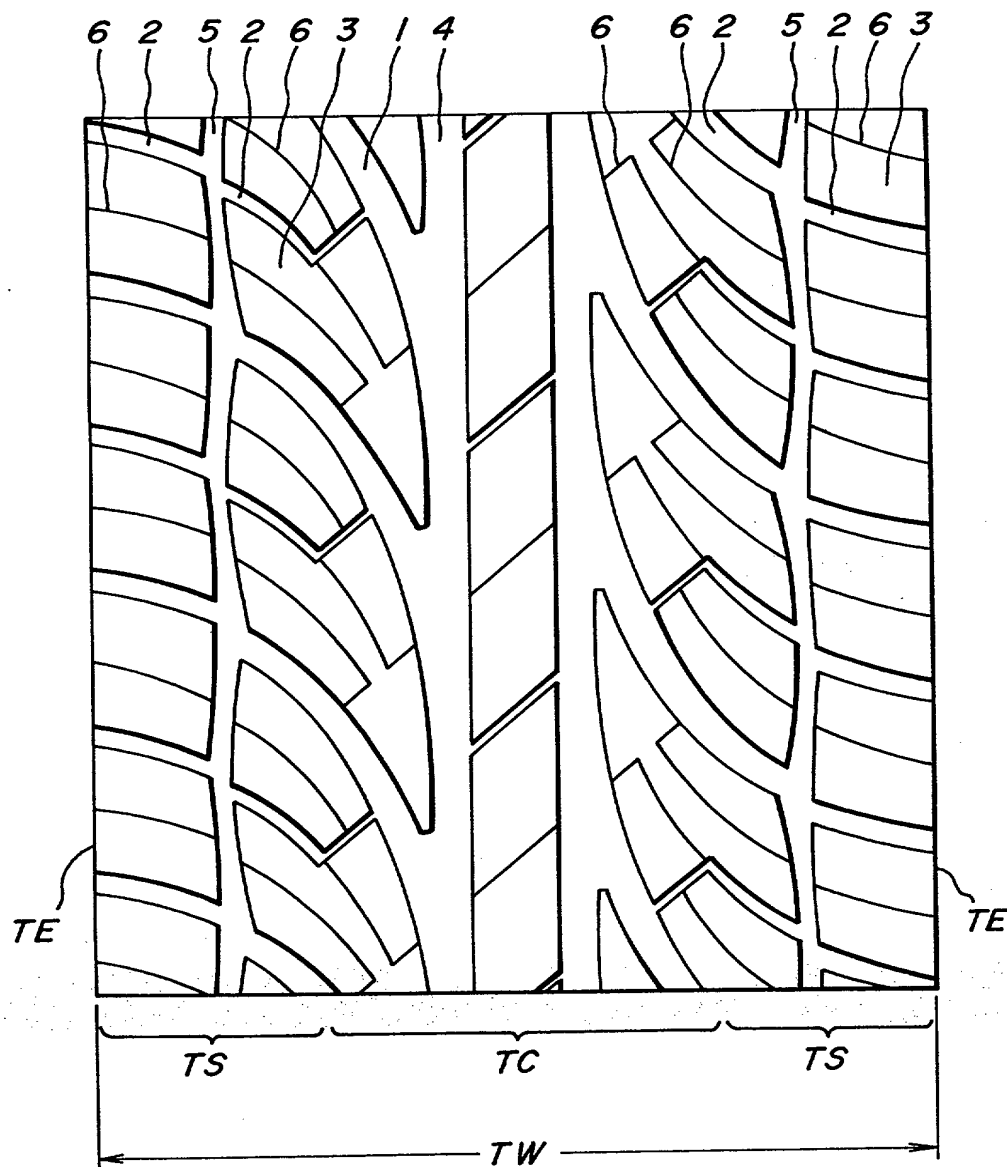

**FIG. 2**

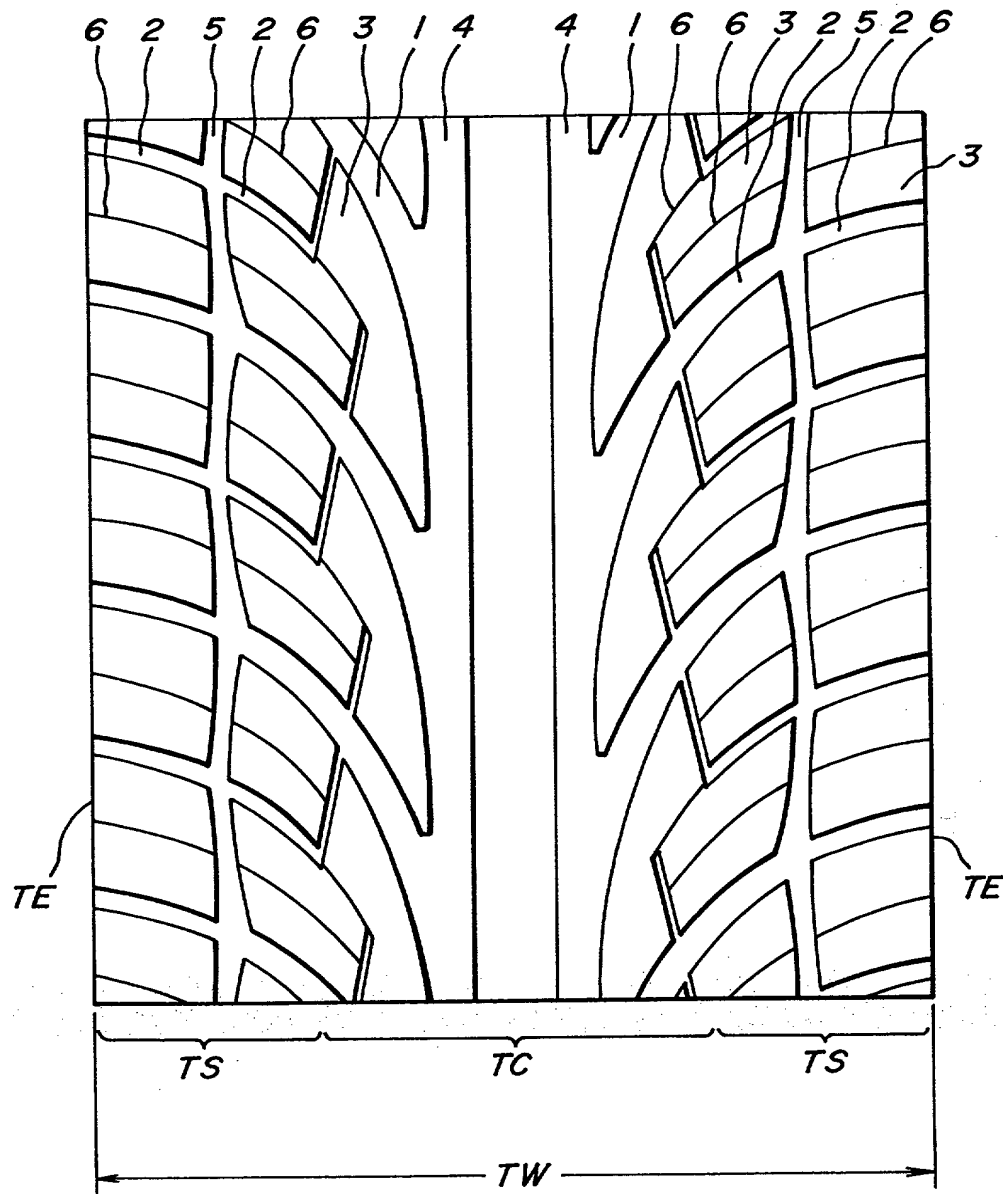

**FIG.3**  
PRIOR ART

